


# Hydraulic compensator

Our hydraulic compensators are specially designed for efficient flow control and optimum energy distribution. The horizontal compensators with an exchange chamber of 60/60 mm or 80/80 mm made of high-quality, black-painted sheet steel offer the highest quality and durability. They are ideal for use in heating systems and guarantee maximum safety due to their priming and leak test.

- † **Versatile application possibilities:** Ideal for heating systems and applications.
- † **Robust construction:** High-quality materials ensure a high resistance to corrosion and mechanical stress.
- † **Compatible:** Suitable for a wide range of systems and components.
- † **Low maintenance:** Minimal maintenance requirements for trouble-free operation.

## HYDRAULIC COMPENSATOR HW 60 / ACCESSORIES

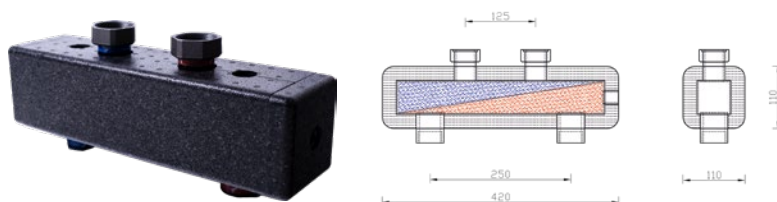


### ORDER NO.

**9006240** HW 60, heating water flow rate 3,0 m³/h

Horizontal compensator with a 60/60 mm exchange chamber made of soldered black sheet steel. Boiler connection nozzle at a distance of 250 mm, the opposite connection nozzles at a distance of 125 mm.

Outlets: G1½" internal threads/ nuts  
Permissible operating pressure: 4 bar

1x G½" socket for temperature sensor  
Boiler connection: G1¼" intern. threads




### ORDER NO.

**6020001** WK 60, 1 pair

Wall bracket set made of galvanized steel, extension either 100 mm or 150 mm. Supplied with screws, dowels and washers.

## HYDRAULIC COMPENSATOR HW 80 / ACCESSORIES

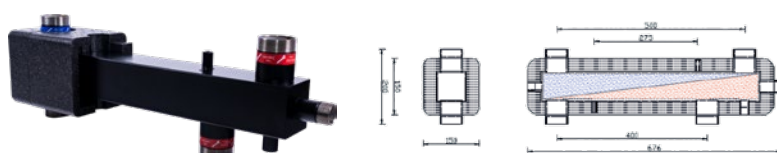


### ORDER NO.

**9009340** HW 80, heating water flow rate 7,0 m³/h

Horizontal compensator with a 80/80 mm exchange chamber made of soldered black sheet steel. Boiler connection nozzle at a distance of 400 mm, the opposite connection nozzles at a distance of 500 mm.

Outlets: G2" external threads  
Permissible operating pressure: 4 bar

2x G½" socket for temperature sensor  
Boiler connection: G2" external threads



### ORDER NO.

**7401001** WK 80, 1 pair

Wall bracket set made of galvanized steel, extension either 160 mm oder 200 mm. Supplied with screws, dowels and washers.