

Radiator manifold VA-HK

Suitable for:




Items delivered: Set consists of supply and return bar, each with two G $\frac{1}{2}$ " internal threads for vent valves. Pre-assembled in sound-insulated holders, including labelling stickers and adjustment instructions, packed in cardboard box.

- **Manifold bar:** Stainless steel AISI 304, rustproof and durable.
- **Dimensions:** DN32 S.S. profile, 1330 mm² cross sectional area.
- **Connections:** G1" internal thread on both sides.
- **Supply:** G $\frac{3}{4}$ " external threads with Eurocone.
- **Return:** G $\frac{3}{4}$ " external threads with Eurocone.
- **Outlets:** 50 mm.
- **Pressure rating / system:** PN6 for heating systems with water quality according to VDI 2035.

ORDER NO.

2902	VA-HK 2 for 2 circuits, length: 190 mm
2903	VA-HK 3 for 3 circuits, length: 240 mm
2904	VA-HK 4 for 4 circuits, length: 290 mm
2905	VA-HK 5 for 5 circuits, length: 340 mm
2906	VA-HK 6 for 6 circuits, length: 390 mm
2907	VA-HK 7 for 7 circuits, length: 440 mm
2908	VA-HK 8 for 8 circuits, length: 490 mm

2909	VA-HK 9 for 9 circuits, length: 540 mm
2910	VA-HK 10 for 10 circuits, length: 590 mm
2911	VA-HK 11 for 11 circuits, length: 640 mm
2912	VA-HK 12 for 12 circuits, length: 690 mm
2913	VA-HK 13 for 13 circuits, length: 740 mm
2914	VA-HK 14 for 14 circuits, length: 790 mm

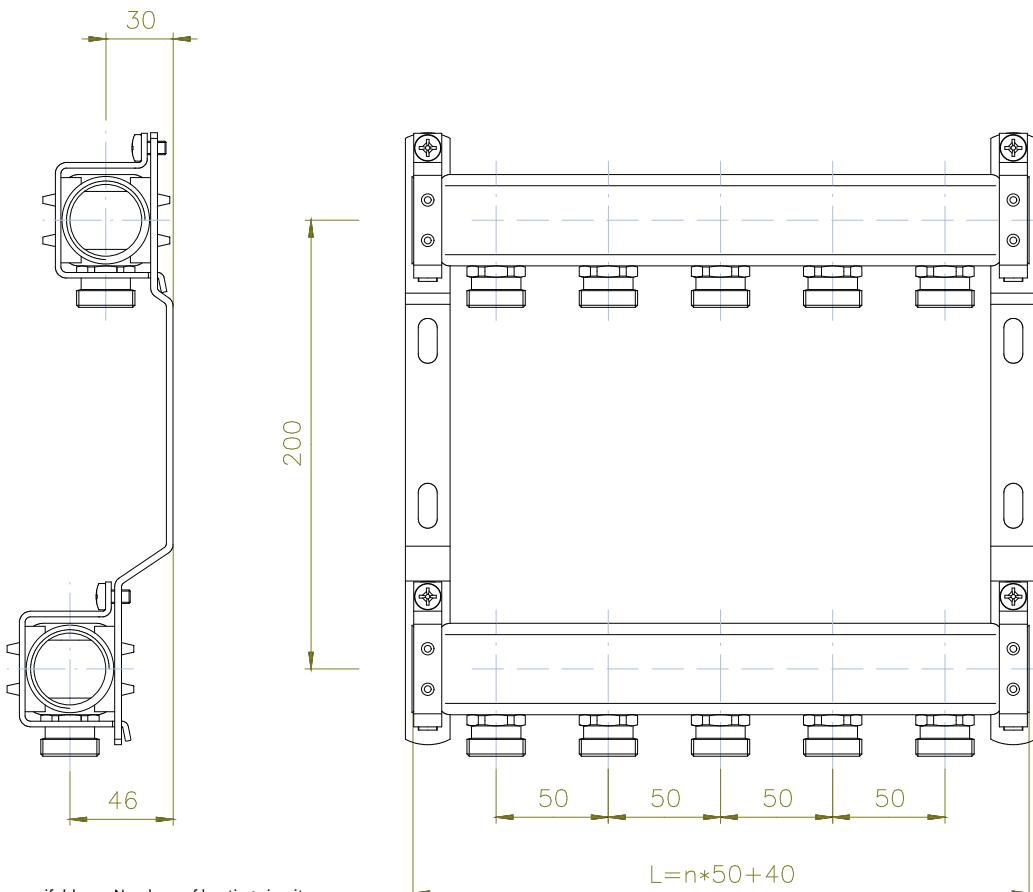

L = Length of the manifold n = Numbers of heating circuits

STRASSHOFER®

strasshofer.de

Version: 04/2025 - Technical changes reserved.