

Industrial manifold IN-KR

Suitable for:




Items delivered: Set consists of supply and return bar. Sound-insulated holders are supplied loose, including labelling stickers and adjustment instructions, packed in cardboard box.

- **Manifold bar:** Stainless steel AISI 304, rustproof and durable.
- **Dimensions:** DN50 S.S. profile, 1760 mm² cross sectional area.
- **Connections:** G1½" internal thread on both sides.
- **Supply:** Balancing fitting DN20 G¾" internal threads.
- **Return:** Ball valves DN20 G¾" internal threads.
- **Outlets:** G¾" IG, distances 80 mm.
- **Pressure rating / system:** PN6 for heating systems with water quality according to VDI 2035.

ORDER NO.

2202	IN-KR 2 for 2 circuits, length: 155 mm
2203	IN-KR 3 for 3 circuits, length: 235 mm
2204	IN-KR 4 for 4 circuits, length: 315 mm
2205	IN-KR 5 for 5 circuits, length: 395 mm
2206	IN-KR 6 for 6 circuits, length: 475 mm
2207	IN-KR 7 for 7 circuits, length: 555 mm
2208	IN-KR 8 for 8 circuits, length: 635 mm

2209	IN-KR 9 for 9 circuits, length: 715 mm
2210	IN-KR 10 for 10 circuits, length: 795 mm
2211	IN-KR 11 for 11 circuits, length: 875 mm
2212	IN-KR 12 for 12 circuits, length: 955 mm
2213	IN-KR 13 for 13 circuits, length: 1035 mm
2214	IN-KR 14 for 14 circuits, length: 1115 mm

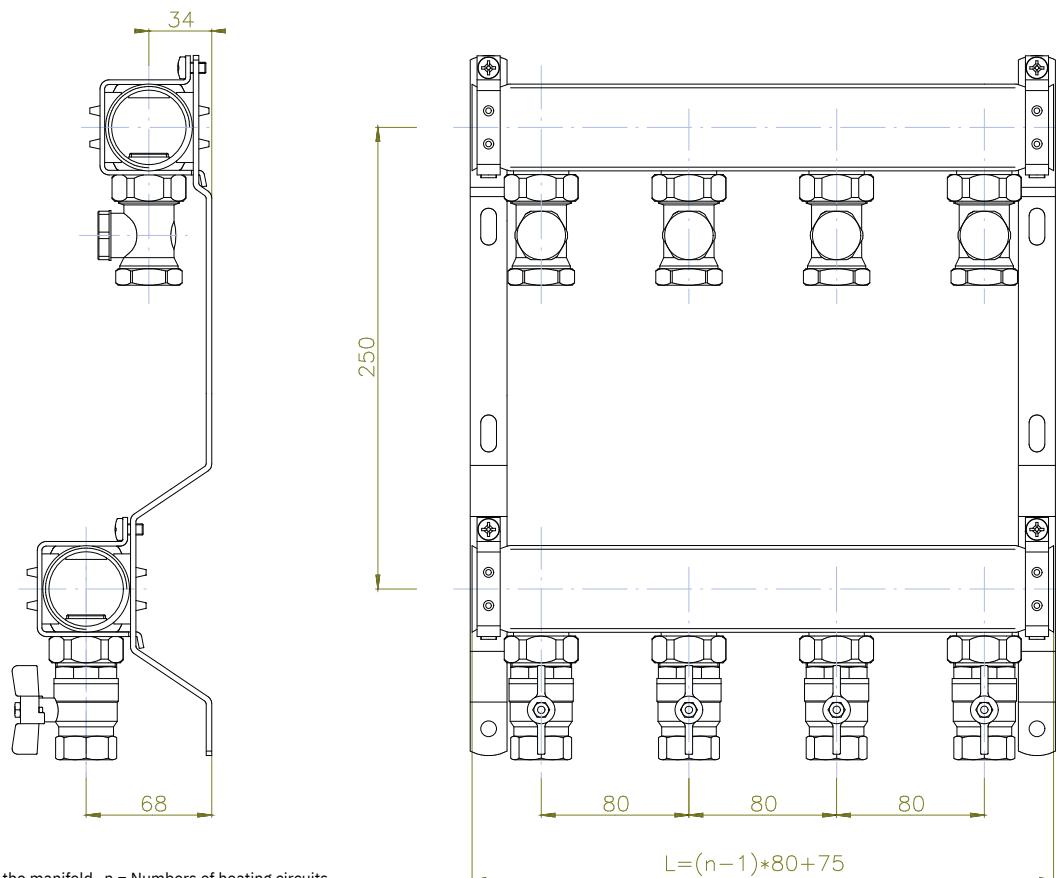

L = Length of the manifold n = Numbers of heating circuits

STRASSHOFER®

strasshofer.de

Version: 04/2025 - Technical changes reserved.