


# Floor heating manifold VA-FBif

Suitable for:




**Items delivered:** Set consists of supply and return bar, each with two G $\frac{1}{2}$ " internal threads for vent valves. Pre-assembled in sound-insulated holders, including labelling stickers and adjustment instructions, packed in cardboard box.

- **Manifold bar:** Stainless steel AISI 304, rustproof and durable.
- **Dimensions:** DN32 S.S. profile, 1330 mm<sup>2</sup> cross sectional area.
- **Connections:** G1" internal thread on both sides.
- **Supply:** Flow meters 0-5,0 l/min.
- **Return:** Integrated valves, pre-adjustable, connection thread M30x1,5 mm, with manual adjustment cap, actuator can be retrofitted, K<sub>vs</sub> 2,74.
- **Outlets:** G $\frac{3}{4}$ " external threads with Eurocone, distances 50 mm.
- **Pressure rating / system:** PN6 for heating systems with water quality according to VDI 2035.

## ORDER NO.

3702	VA-FBif 2 for 2 circuits, length: 190 mm
3703	VA-FBif 3 for 3 circuits, length: 240 mm
3704	VA-FBif 4 for 4 circuits, length: 290 mm
3705	VA-FBif 5 for 5 circuits, length: 340 mm
3706	VA-FBif 6 for 6 circuits, length: 390 mm
3707	VA-FBif 7 for 7 circuits, length: 440 mm
3708	VA-FBif 8 for 8 circuits, length: 490 mm

3709	VA-FBif 9 for 9 circuits, length: 540 mm
3710	VA-FBif 10 for 10 circuits, length: 590 mm
3711	VA-FBif 11 for 11 circuits, length: 640 mm
3712	VA-FBif 12 for 12 circuits, length: 690 mm
3713	VA-FBif 13 for 13 circuits, length: 740 mm
3714	VA-FBif 14 for 14 circuits, length: 790 mm
3715	VA-FBif 15 for 15 circuits, length: 840 mm

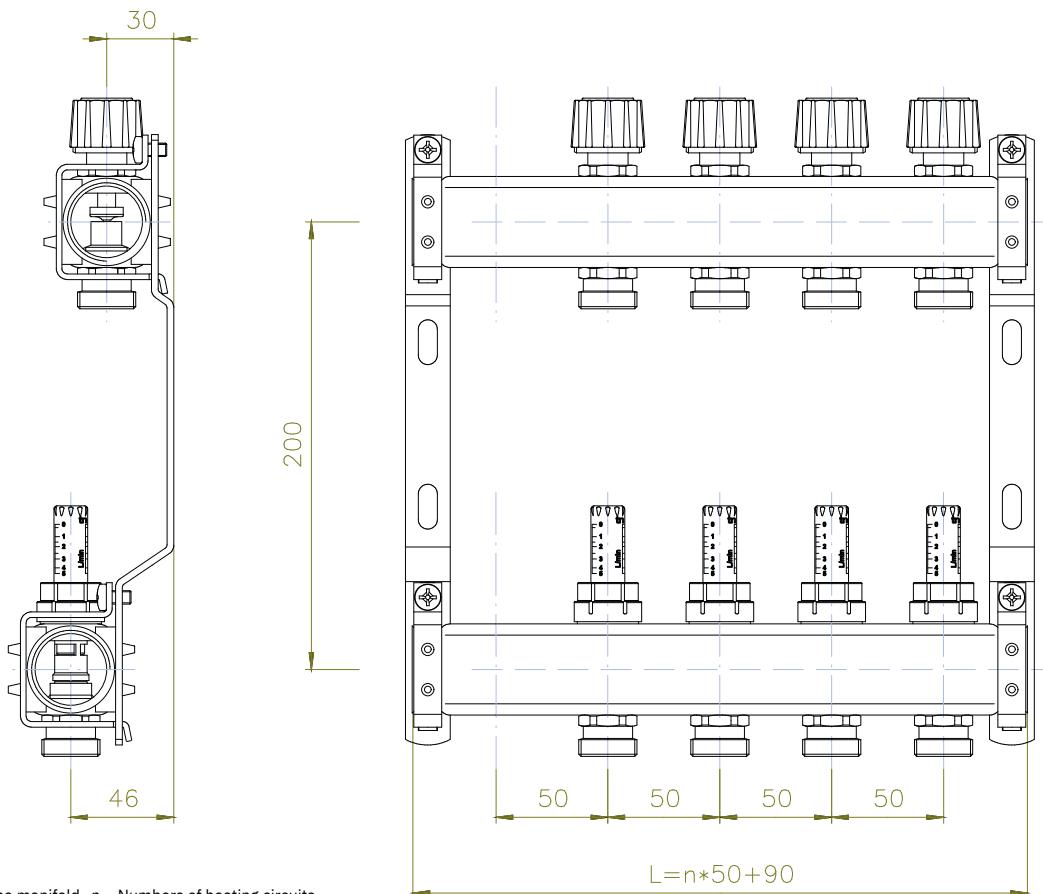

L = Length of the manifold n = Numbers of heating circuits

# STRASSHOFER®

strasshofer.de

Version: 04/2025 - Technical changes reserved.