


Floor heating manifold VA-Fix16

Suitable for:



Items delivered: Set consists of supply and return bar, each with two G½" internal threads for vent valves. Pre-assembled in sound-insulated holders, including labelling stickers and adjustment instructions, packed in cardboard box.


- **Manifold bar:** Stainless steel AISI 304, rustproof and durable.
- **Dimensions:** DN32 S.S. profile, 1330 mm² cross sectional area.
- **Connections:** G1" internal thread on both sides.
- **Supply:** Flow meters 0-5,0 l/min.
- **Return:** Integrated valves, pre-adjustable, connection thread M30x1,5 mm, with manual adjustment cap, actuator can be retrofitted, K_{vs} 2,74.
- **Outlets:** certified plug-in technology for multilayer pipe (DVGW/IMA) or plastic pipe 16x2,0 mm; distances 50 mm.
- **Pressure rating / system:** PN6 for heating systems with water quality according to VDI 2035.

ORDER NO.

3102	VA-Fix16-2 for 2 circuits, length: 190 mm
3103	VA-Fix16-3 for 3 circuits, length: 240 mm
3104	VA-Fix16-4 for 4 circuits, length: 290 mm
3105	VA-Fix16-5 for 5 circuits, length: 340 mm
3106	VA-Fix16-6 for 6 circuits, length: 390 mm
3107	VA-Fix16-7 for 7 circuits, length: 440 mm
3108	VA-Fix16-8 for 8 circuits, length: 490 mm

3109	VA-Fix16-9 for 9 circuits, length: 540 mm
3110	VA-Fix16-10 for 10 circuits, length: 590 mm
3111	VA-Fix16-11 for 11 circuits, length: 640 mm
3112	VA-Fix16-12 for 12 circuits, length: 690 mm
3113	VA-Fix16-13 for 13 circuits, length: 740 mm
3114	VA-Fix16-14 for 14 circuits, length: 790 mm
3115	VA-Fix16-15 for 15 circuits, length: 840 mm

! Observe installation instructions!

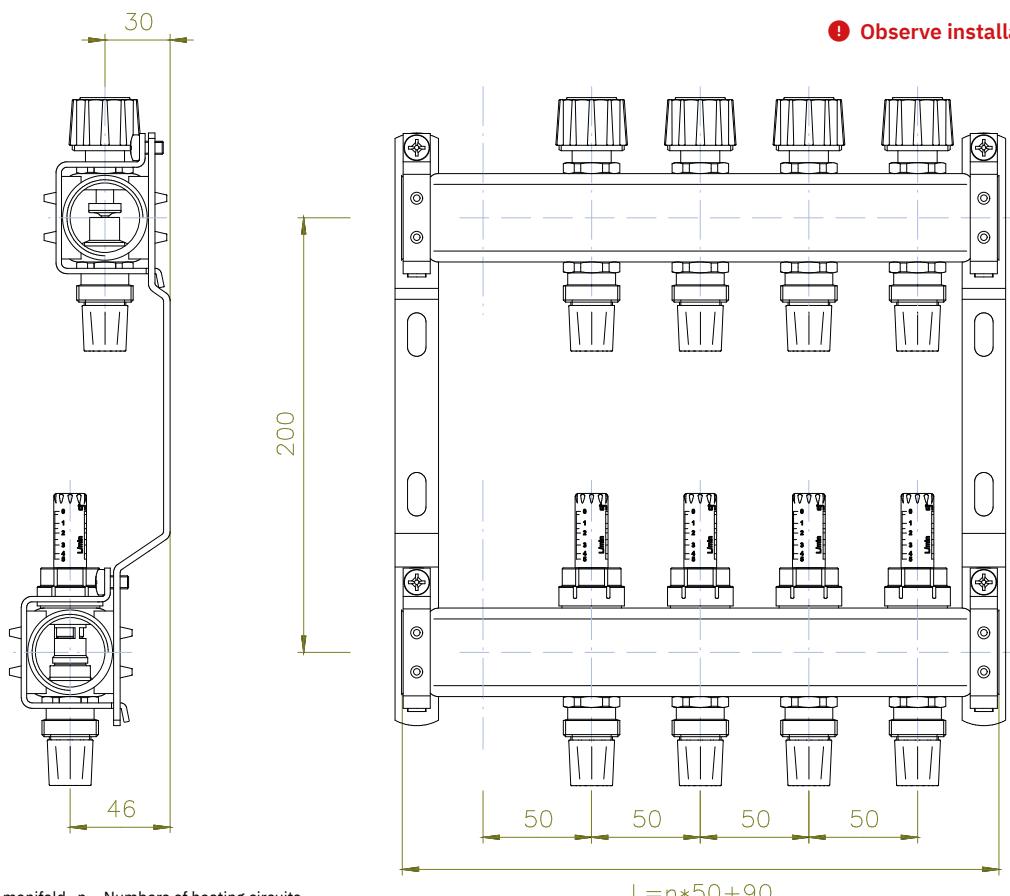

L = Length of the manifold n = Numbers of heating circuits

$L = n \cdot 50 + 90$

STRASSHOFER®

strasshofer.de

Version: 04/2025 - Technical changes reserved.