

Floor heating manifold VA-FBi

Suitable for:




Items delivered: Set consists of supply and return bar, each with two G $\frac{1}{2}$ " internal threads for vent valves. Pre-assembled in sound-insulated holders, including labelling stickers and adjustment instructions, packed in cardboard box.

- **Manifold bar:** Stainless steel AISI 304, rustproof and durable.
- **Dimensions:** DN32 S.S. profile, 1330 mm² cross sectional area.
- **Connections:** G1" internal thread on both sides.
- **Supply:** Integrated balancing and shut-off fitting.
- **Return:** Integrated valves, pre-adjustable, connection thread M30x1,5 mm, with manual adjustment cap, actuator can be retrofitted, K_{vs} 2,74.
- **Outlets:** G $\frac{3}{4}$ " external threads with Eurocone, distances 50 mm.
- **Pressure rating / system:** PN6 for heating systems with water quality according to VDI 2035.

ORDER NO.

3402	VA-FBi 2 for 2 circuits, length: 190 mm
3403	VA-FBi 3 for 3 circuits, length: 240 mm
3404	VA-FBi 4 for 4 circuits, length: 290 mm
3405	VA-FBi 5 for 5 circuits, length: 340 mm
3406	VA-FBi 6 for 6 circuits, length: 390 mm
3407	VA-FBi 7 for 7 circuits, length: 440 mm
3408	VA-FBi 8 for 8 circuits, length: 490 mm

3409	VA-FBi 9 for 9 circuits, length: 540 mm
3410	VA-FBi 10 for 10 circuits, length: 590 mm
3411	VA-FBi 11 for 11 circuits, length: 640 mm
3412	VA-FBi 12 for 12 circuits, length: 690 mm
3413	VA-FBi 13 for 13 circuits, length: 740 mm
3414	VA-FBi 14 for 14 circuits, length: 790 mm
3415	VA-FBi 15 for 15 circuits, length: 840 mm

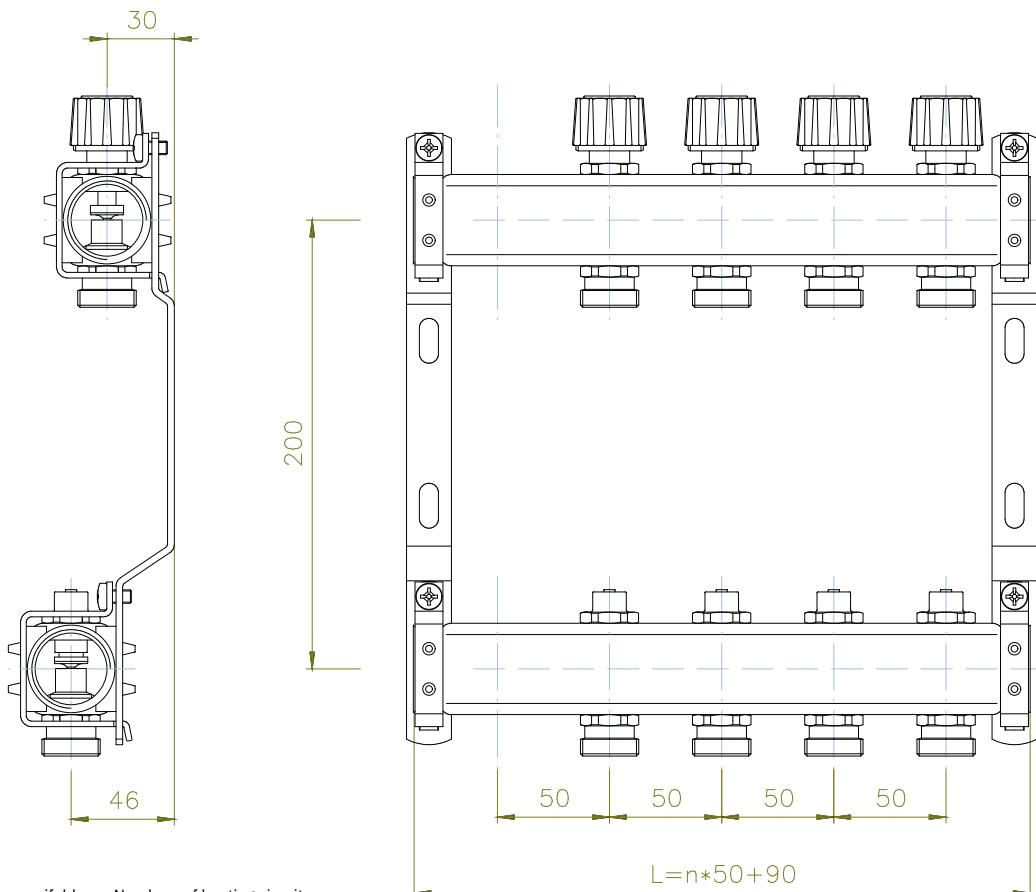

L = Length of the manifold n = Numbers of heating circuits

STRASSHOFER®

strasshofer.de

Version: 04/2025 - Technical changes reserved.