

Large-area manifold XL-FBif

Suitable for:




Items delivered: Set consists of supply and return bar. Sound-insulated holders are supplied loose, including labelling stickers and instructions. The manifold is supplied in connection for a plastic pipe (25x2,3 mm).

- **Manifold bar:** Stainless steel AISI 304, rustproof and durable.
- **Dimensions:** DN50 S.S. profile, 1760 mm² cross sectional area.
- **Connections:** G1½" internal thread on both sides.
- **Supply:** Flow meters 0-8,0 l/min.
- **Return:** Integrated valves, pre-adjustable, connection thread M30x1,5 mm, with manual adjustment cap, actuator can be retrofitted, K_{vs} 3,9.
- **Outlets:** Clamp connection KS 25x2,3 mm, distances 80 mm.
- **Pressure rating / system:** PN6 for heating systems with water quality according to VDI 2035.

ORDER NO.

3602	XL-FBif 2 for 2 circuits, length: 155 mm
3603	XL-FBif 3 for 3 circuits, length: 235 mm
3604	XL-FBif 4 for 4 circuits, length: 315 mm
3605	XL-FBif 5 for 5 circuits, length: 395 mm
3606	XL-FBif 6 for 6 circuits, length: 475 mm
3607	XL-FBif 7 for 7 circuits, length: 555 mm
3608	XL-FBif 8 for 8 circuits, length: 635 mm

3609	XL-FBif 9 for 9 circuits, length: 715 mm
3610	XL-FBif 10 for 10 circuits, length: 795 mm
3611	XL-FBif 11 for 11 circuits, length: 875 mm
3612	XL-FBif 12 for 12 circuits, length: 955 mm
3613	XL-FBif 13 for 13 circuits, length: 1035 mm
3614	XL-FBif 14 for 14 circuits, length: 1115 mm

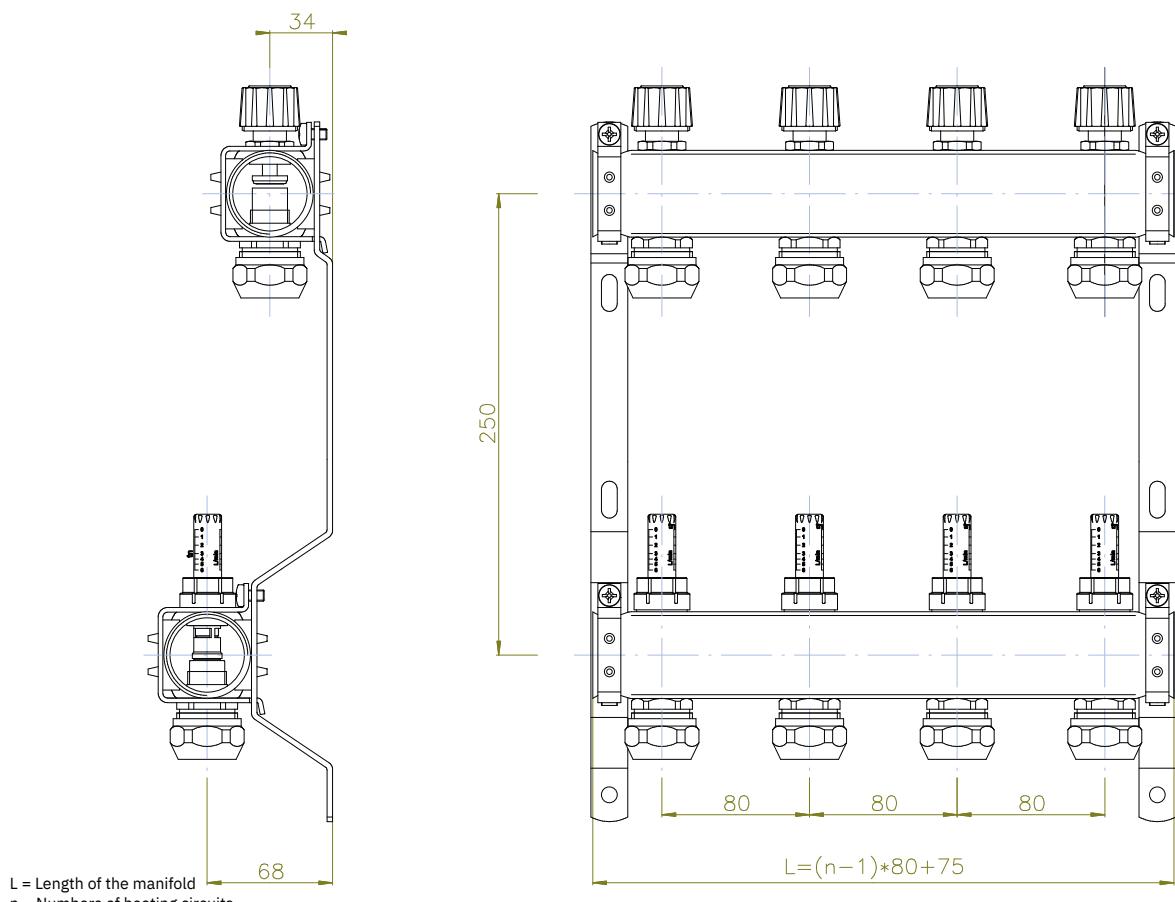

STRASSHOFER®

strasshofer.de

Version: 04/2025 - Technical changes reserved.