

# Industrial manifold IN-KHF

Suitable for:




**Items delivered:** Set consists of supply and return bar. Sound-insulated holders are supplied loose, including labelling stickers and adjustment instructions, packed in cardboard box.

- **Manifold bar:** Stainless steel AISI 304, rustproof and durable.
- **Dimensions:** DN50 S.S. profile, 1760 mm<sup>2</sup> cross sectional area.
- **Connections:** G1½" internal thread on both sides.
- **Supply:** Ball valves DN20 G¾" internal threads.
- **Return:** Flow meters 2-12 l/min G¾" external threads.
- **Outlets:** Supply G¾" int. thr., return G¾" ext. thr., distances 80 mm.
- **Pressure rating / system:** PN6 for heating systems with water quality according to VDI 2035.

## ORDER NO.

|      |   |
|------|---|
| 2302 | IN-KHF 2 for 2 circuits, length: 155 mm |
| 2303 | IN-KHF 3 for 3 circuits, length: 235 mm |
| 2304 | IN-KHF 4 for 4 circuits, length: 315 mm |
| 2305 | IN-KHF 5 for 5 circuits, length: 395 mm |
| 2306 | IN-KHF 6 for 6 circuits, length: 475 mm |
| 2307 | IN-KHF 7 for 7 circuits, length: 555 mm |
| 2308 | IN-KHF 8 for 8 circuits, length: 635 mm |

|      |  |
|------|--|
| 2309 | IN-KHF 9 for 9 circuits, length: 715 mm    |
| 2310 | IN-KHF 10 for 10 circuits, length: 795 mm  |
| 2311 | IN-KHF 11 for 11 circuits, length: 875 mm  |
| 2312 | IN-KHF 12 for 12 circuits, length: 955 mm  |
| 2313 | IN-KHF 13 for 13 circuits, length: 1035 mm |
| 2314 | IN-KHF 14 for 14 circuits, length: 1115 mm |

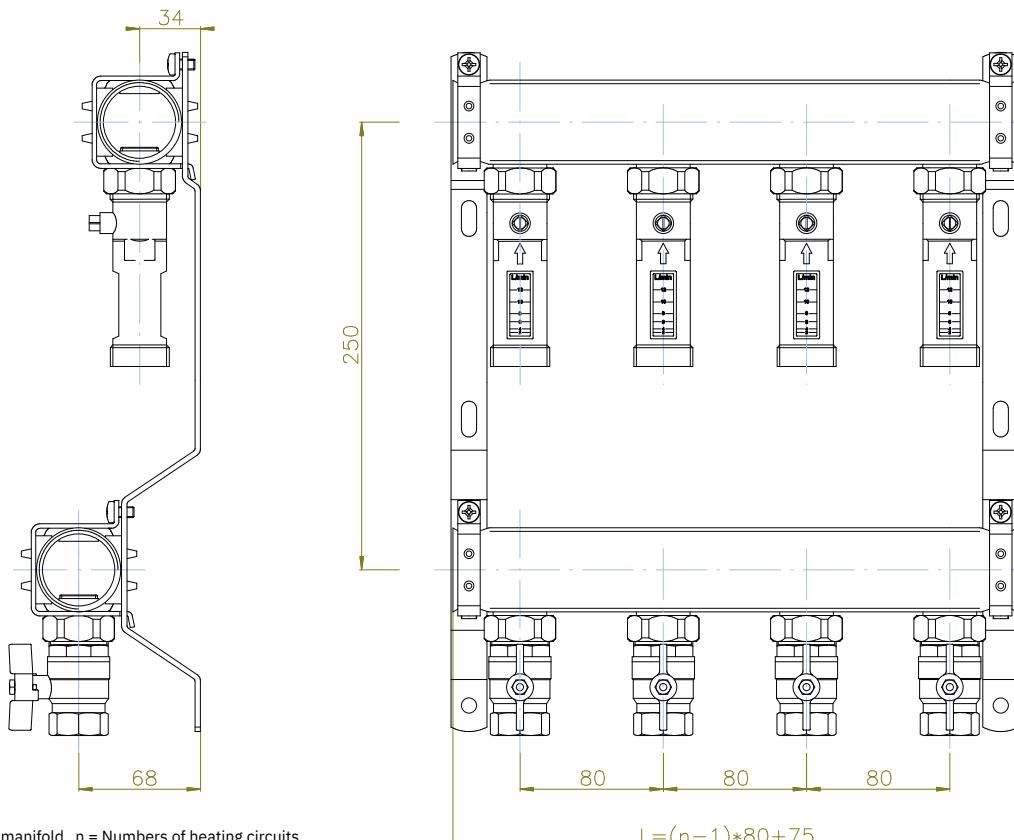

L = Length of the manifold n = Numbers of heating circuits

# STRASSHOFER®

[strasshofer.de](http://strasshofer.de)

Version: 04/2025 - Technical changes reserved.